


Cod.

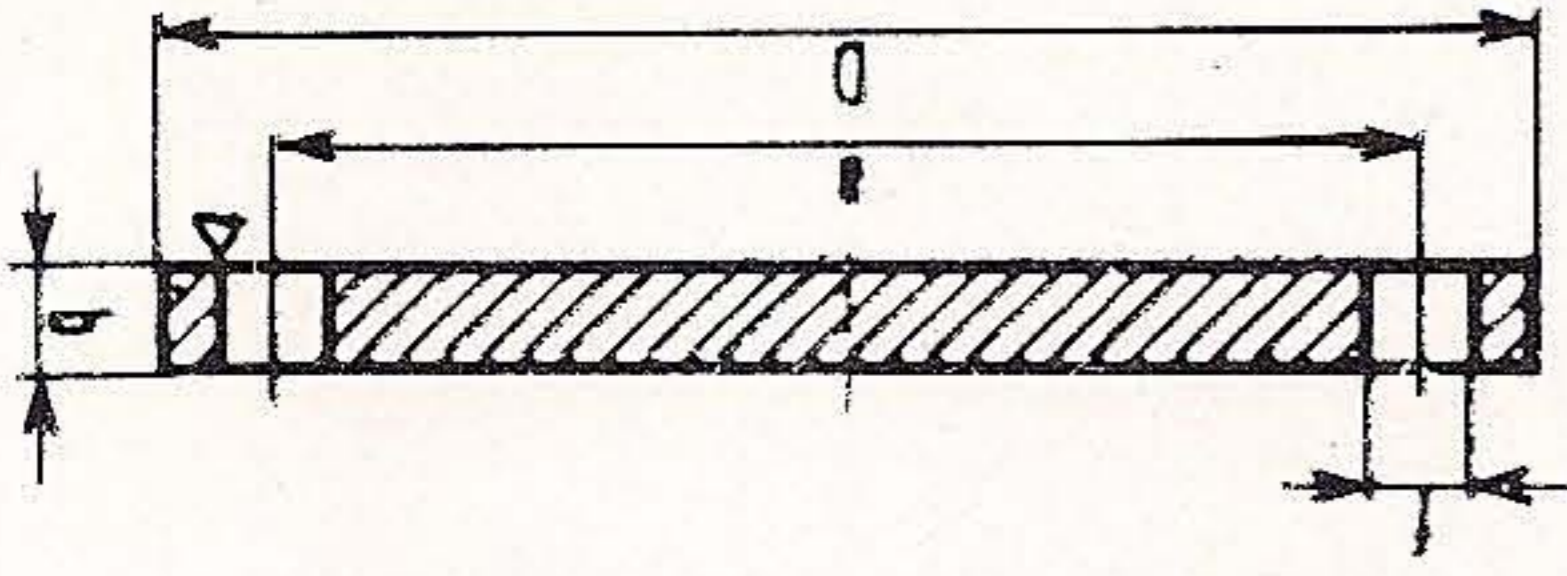

## FLANGE CIECHE in ACCIAIO

EN 1092-1 tipo 5 pn6  
EN 1092-1 tipo 5 pn10  
( ex uni 6091 e uni 6092 )

\* Per tubazioni convoglianti olio la flangia deve avere 8 fori

Indicazioni per la design.	a	b	D	f	N° fori	Filettatura delle viti	Peso circa
DN	mm	mm	mm	mm		mm	Kg
10	50	12	75	11	4	M 10	0,38
15	55	12	80	11	4	M 10	0,44
20	65	14	90	11	4	M 10	0,65
25	75	14	100	11	4	M 10	0,82
32	90	14	120	14	4	M 12	1,17
40	100	14	130	14	4	M 12	1,39
50	110	14	140	14	4	M 12	1,62
65	130	14	160	14	4	M 12	2,14
80	150	16	190	18	4	M 16	3,43
100	170	16	210	18	4*	M 16	4,22
125	200	18	240	18	8	M 16	6,11
150	225	18	265	18	8	M 16	7,51
175	255	20	295	18	8	M 16	10,2
200	280	20	320	18	8	M 16	12,3
250	335	22	375	18	12	M 16	18,5
300	395	22	440	22	12	M 20	25,5
350	445	22	490	22	12	M 20	31,8
400	495	22	540	22	16	M 20	38,5
450	550	22	595	22	16	M 20	47,0
500	600	24	645	22	20	M 20	60,4
200	295	24	340	22	8	M 20	16,5
250	350	26	395	22	12	M 20	24,1
300	400	26	445	22	12	M 20	30,8
350	460	26	505	22	16	M 20	39,6
400	515	26	565	25	16	M 22	49,6
450	565	26	615	25	20	M 22	58,6
500	620	28	670	25	20	M 22	75,3