


# VALVOLE ACCIAIO

Cod.

## Valvole a sfera per scarico di fondo

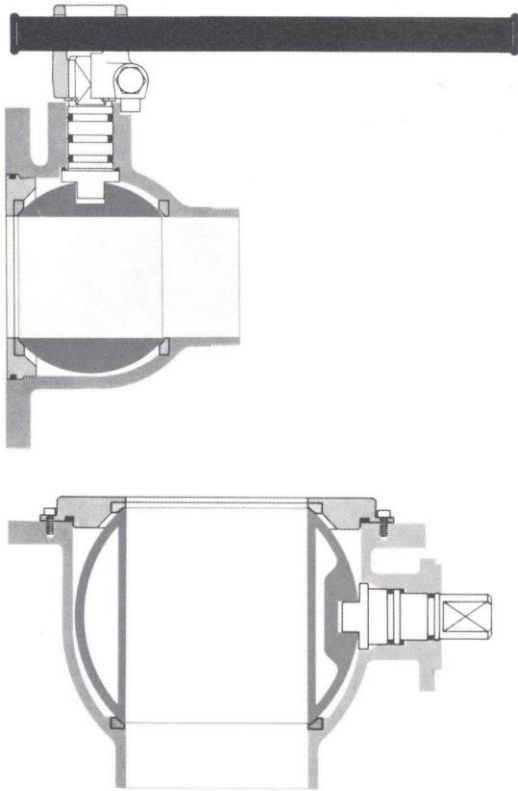

\* PN 10

DN	E	L	C'	G	G'	H	H'	M	N	P	t	Maniglia		W	Peso		Flangia superiore			
												U x V	Tipo		F/2B	F/2	D'	a	f x N°	d
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		poll.	Kg≠	Kg≠	mm	mm	mm	mm
40	38	91	1,5	160		79	124	17	34	31,5	14	10 x 14,5	2	1 1/2	4,7	3,5	150	110	18 x 4	16
50	51	117	3	215		118	151	17	46	45	25	14 x 19,5	2	2	9	7,5	200	160	18 x 8	18
65	65	120	5,5	215		130	163	17	46	46,5	25	14 x 19,5	2	2 1/2	9	7,5	200	160	18 x 8	18
80	78	150	7		500	145	175	20	62	55	32	20 x 28	7	3	12,5	11	220	180	18 x 8	18
100	96	165	11		500	159	189	20	62	65	32	20 x 28	7	4	18	16	250	210	18 x 8	22

\* PN 10

A richiesta possono essere forniti con leva di manovra oppure con attuatore pneumatico.

DN	E	L	C'	H	P	t	Maniglia		BW	Peso		* Flangia superiore			
							U x V			F/2B	F/2	D'	a	f x N°	d
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kg≠	Kg≠	mm	mm	mm	mm
125	120	202	14	203	82	43	26 x 36		138,4	29	23	285	240	22 x 8	32
150	148	235	20	223	96	43	26 x 36		164,5	46	36	340	295	22 x 8	44
200	190	270	28	253	117	43	26 x 36		216	64	50	395	350	22 x 12	46