
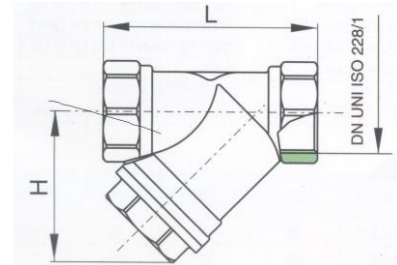


Valvole BRONZO

Cod.

Filtro a Y con cestello in acciaio inox

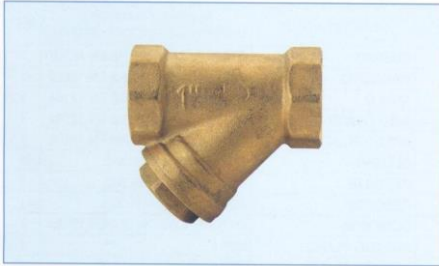


MISURA SIZE	DN	H	L	Kv	PN
3/8"	10	40	55	3,41	20
1/2"	15	40	58	4,47	20
3/4"	20	50	70	7,85	20
1"	25	60	87	11,08	20
1 1/4"	32	68	96	16,00	20
1 1/2"	40	75	106	22,28	20
2"	50	90	126	25,37	20
2 1/2"	65	100	145	60	16
3"	80	118	165	80	16
4"	100	170	215	100	16

Cod.

Valvola di ritegno EUROPA



Adatta all'impiego in impianti idraulici, di riscaldamento, di condizionamento e pneumatici. Installabile in qualunque posizione: verticale, orizzontale, obliqua.



Corpo in ottone.
Piastrino in acciaio inox.
Tenuta in NBR.
Perno guida in ottone.
Molla in acciaio inox.
Temperature minima e massima di esercizio: -20°C, 100°C.
Attacchi filettati: ISO228 (equivalente a DIN EN ISO 228 e BS EN ISO 228).

MISURE	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
A (mm)	55	58,5	65	74,5	83	93	101	122	141,5	158,5
B (mm)	34,5	34,5	41,5	48	60,5	71	87	120	140	172,5
PRESSIONE spigolo bar	25	25	25	25	18	18	18	12	12	12
PRESSIONE PN	360	360	360	360	260	260	260	170	170	170