


# Valvole BRONZO

Cod.

## Valvola di fondo con filtro in acciaio inox





MISURA SIZE	DN	I	Ch	ØB	A	D	ØE	ØF	G	Kv	PN	Kg
1/2"	15	12	25	28	44,5	43	23	26	87,5	3,7	40	0,10
3/4"	20	12	31	34,5	47,5	48	29	32	95,5	5,8	40	0,17
1"	25	14,5	38	42	56	48	38	41	104	8,6	25	0,27
1 1/4"	32	16	48	52	62	57	45	49	119	13,8	25	0,43
1 1/2"	40	18	54	61	70	68	50	55	138	20,2	16	0,62
2"	50	19	67	73	78	83	62	67	161	30,9	16	0,93
2 1/2"	65	24	83	90	92	83,5	82	86	175,5	48,8	12	1,48
3"	80	29	98	113	113,5	99	94	99	212,5	79,4	12	2,51
4"	100	32	128	139	126,8	115	117	122	241,8	124,9	10	4,41

Limiti di temperatura: -20°C +100°C - Temperature range: -20°C +100°C.

Cod.

## Valvola di fondo con succheruola

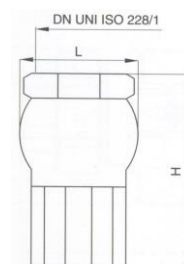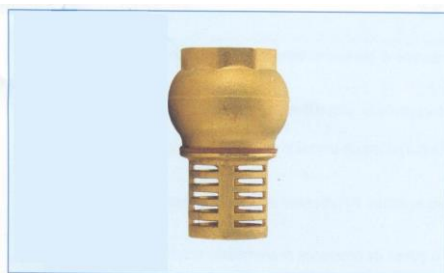

MISURA SIZE	DN	H	L	Kg
3/4"	20	73	45	0,22
1"	25	81	51	0,29
1 1/4"	32	95	61	0,44
1 1/2"	40	103	68	0,59
2"	50	121	80	0,94
2 1/2"	65	136	103	1,35
3"	80	151	121	1,67
4"	100	187	136	3,32